

Guillemin

NFE 29 572/EN 14 420-8

MATERIAL MATIÈRE MATERIAL

■ AL = Aluminium

■ BR = Brass Laiton Latón

■ SS = Stainless steel Inox

■ PP = Polypropylene

SIZE DIMENSIONS DIMENSIONES


From DN 15 to DN 150 mm

THREAD FILETAGE ROSCA

BSPP/NF ISO 228-1

GASKETS JOINTS JUNTA

NBR/CSM

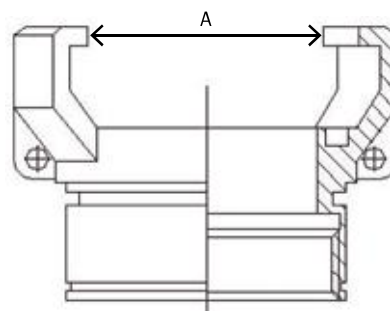

DN	A
15	26
20	32
25	37,5
32	42,5
40	55
50	69
65	84
80	104
100	124
150	193

AL = Aluminium BR = Brass Laiton Latón ST = Steel Acier Acero SS = Stainless steel Inox PP = Polypropylene

Trelleborg Fittings 2015

		ID coupling Diam. raccord Diam. racor	ID shank Diam. douille Diam. espiga	Ref.
	Serrated hose shank with collar. With locking ring. NBR white gasket. Cranté à collerette. Avec verrou. Joint NBR blanc. <i>Acanalado con cuello. Con cierre. Junta NBR blanco.</i>	40	40	510 12 03
		50	51	011 74 25
		65	64	011 74 26
		80	76	011 72 44
		80	81	011 77 34
		100	102	011 74 27
		100	105	510 16 21
	Serrated hose shank without collar. With locking ring. NBR white gasket. Cranté sans collerette. Avec verrou. Joint NBR blanc. <i>Acanalado sin cuello. Con cierre. Junta NBR blanco.</i>	20	25	073 60 64
		25	30	073 60 65
		25	25	510 20 43
		32	35	073 60 66
		40	45	073 60 67
		40	35	510 17 98
		50	55	073 60 69
		65	70	073 60 72
		80	90	073 60 73
	Serrated hose shank with collar. With locking ring. Without ears. NBR white gasket. Cranté à collerette. Avec verrou. Sans oreilles. Joint NBR blanc. <i>Acanalado con cuello. Con cierre. Sin orejas. Junta NBR blanco.</i>	50	51	510 17 88
		80	76	510 24 45
	Serrated hose shank without collar. With locking ring. Without ears. NBR white gasket. Cranté sans collerette. Avec verrou. Sans oreilles. Joint NBR blanc. <i>Acanalado sin cuello. Con cierre. Sin orejas. Junta NBR blanco.</i>	80	90	510 20 48
	Grooved hose shank. With locking ring. NBR white gasket. A gorge. Avec verrou. Joint NBR blanc. <i>Acanalado. Con cierre. Junta NBR blanco.</i>	80	90	510 19 85
		100	110	510 19 86
	Female thread. With locking ring. NBR white gasket. Fileté femelle. Avec verrou. Joint NBR blanc. <i>Rosca hembra. Con cierre. Junta NBR blanco.</i>	20	3/4"	510 12 89
		25	1"	510 12 90
		32	1"1/4	510 12 91
		40	1"1/2	510 12 92
		50	2"	510 12 93
		65	2"1/2	510 12 94
		65	2"	510 20 77
		80	2"1/2	510 20 78
		80	3"	510 12 95
		100	4"	510 12 96
		150	6"	510 12 97

AL = Aluminium BR = Brass Laiton Latón ST = Steel Acier Acero SS = Stainless steel Inox PP = Polypropylene

Trelleborg Fittings 2015

		ID coupling Diam. raccord Diam. racor	ID shank Diam. douille Diam. espiga	Ref.
	Female thread. With locking ring. Without ears. NBR white gasket. Fileté femelle. Avec verrou. Sans oreilles. Joint NBR blanc. <i>Rosca hembra. Con cierre. Sin orejas. Junta NBR blanco.</i>	40	1"1/2	510 50 56
		50	2"	510 50 55
		65	2"1/2	510 50 57
		80	3"	510 19 51
		100	4"	510 50 54
	Female thread. Without locking ring. Without gasket. Fileté femelle. Sans verrou. Sans joint. <i>Rosca hembra. Sin cierre. Sin junta.</i>	20	3/4"	510 15 77
		25	1"	510 15 78
		32	1"1/4	510 15 79
		40	1"1/2	510 15 80
		50	2"	510 15 81
		65	2"1/2	510 15 82
		80	3"	510 15 83
	Male thread. With locking ring. NBR white gasket. Fileté mâle. Avec verrou. Joint NBR blanc. <i>Rosca macho. Con cierre. Junta NBR blanco.</i>	100	4"	510 15 84
		20	3/4"	510 12 67
		25	1"	510 12 68
		32	1"1/4	510 12 69
		40	1"1/2	510 12 70
		50	2"	510 12 71
		65	2"1/2	510 12 72
		65	2"	510 20 79
		80	3"	510 12 73
	Male thread. Without locking ring. Without gasket. Fileté mâle. Sans verrou. Sans joint. <i>Rosca macho. Sin cierre. Sin junta.</i>	80	2"1/2	510 20 80
		100	4"	510 12 74
		150	6"	510 12 75
		20	3/4"	510 13 08
		25	1"	510 13 09
		32	1"1/4	510 13 10
		40	1"1/2	510 13 11
		50	2"	510 13 12
		65	2"1/2	510 13 13
		80	3"	510 13 14
		100	4"	510 13 15

AL = Aluminium BR = Brass Laiton Latón ST = Steel Acier Acero SS = Stainless steel Inox PP = Polypropylene

Trelleborg Fittings 2015

		ID coupling Diam. raccord Diam. racor	ID shank Diam. douille Diam. espiga	Ref.
 Reductor. With locking ring. NBR white gasket. Réduction. Avec verrou. Joint NBR blanc. <i>Reductor. Con cierre. Junta NBR blanco.</i>	AL	100 - 40		510 12 15
		100 - 50		510 12 16
		100 - 65		510 12 17
		100 - 80		510 12 18
		150 - 100		510 12 19
		40 - 20		510 12 04
		40 - 25		510 12 05
		40 - 32		510 12 06
		50 - 25		510 12 07
		50 - 32		510 12 08
		50 - 40		510 12 09
		65 - 40		510 12 10
		65 - 50		510 12 11
		80 - 40		510 12 12
		80 - 50		510 12 13
		80 - 65		510 12 14
 Cap. With handle. NBR white gasket. Bouchon. A poignée. Joint NBR blanc. <i>Tapon. Con punado. Junta NBR blanco.</i>	AL	25		510 13 42
		32		510 13 43
		40		510 13 44
		50		510 13 45
		65		510 13 46
		80		510 13 47
		100		510 13 48
 Cap. With locking ring. NBR white gasket. Bouchon. Avec verrou. Joint NBR blanc. <i>Tapon. Con cierre. Junta NBR blanco.</i>	AL	20		510 13 26
		25		510 13 27
		32		510 13 28
		40		510 13 29
		50		510 13 30
		65		510 13 31
		80		510 13 32
		100		510 13 33
 Cap. Lockable. NBR white gasket. Bouchon. Cadenassable. Joint NBR blanc. <i>Tapon. Con cadena. Junta NBR blanco.</i>	AL	150		510 13 34
		50		510 13 38
		65		510 13 39
		80		510 13 40
		100		510 13 41

AL = Aluminium BR = Brass Laiton Latón ST = Steel Acier Acero SS = Stainless steel Inox PP = Polypropylene

Trelleborg Fittings 2015

		ID coupling Diam. raccord Diam. racor	ID shank Diam. douille Diam. espiga	Ref.
	Serrated hose shank with collar. With locking ring. Black CSM gasket. Cranté à collerette. Avec verrou. Joint CSM noir. <i>Acanalado con cuello. Con cierre. Junta CSM negro.</i>	SS 316	40	011 72 05
			50	011 74 22
			65	011 74 23
			80	011 67 92
			80	510 23 75
			100	011 74 24
	Serrated hose shank with collar. With secure locking ring. Black CSM gasket. Cranté à collerette. Avec verrou sécurisé. Joint CSM noir. <i>Acanalado con cuello. Con cierre securizado. Junta CSM negro.</i>	SS 316	80	510 50 86
	Serrated hose shank without collar. With locking ring. Black CSM gasket. Cranté sans collerette. Avec verrou. Joint CSM noir. <i>Acanalado sin cuello. Con cierre. Junta CSM negro.</i>	SS 316	15	011 16 02
			20	011 16 03
			25	011 16 04
			32	011 16 05
			40	011 16 06
			50	011 16 07
			65	011 15 09
			80	011 14 57
	Serrated hose shank for circlip. With locking ring. Black CSM gasket. Douille à jonc. Avec verrou. Joint CSM noir. <i>Acanalado para anillo. Con cierre. Junta CSM negro.</i>	SS 316	40	510 06 18
			50	510 06 19
			65	510 06 20
			80	510 06 21
			100	510 07 67
	Female thread. With locking ring. Black CSM gasket. Fileté femelle. Avec verrou. Joint CSM noir. <i>Rosca hembra. Con cierre. Junta CSM negro.</i>	SS 316	15	510 12 80
			20	510 12 81
			25	510 12 82
			32	510 12 83
			40	510 12 84
			50	510 12 85
			65	510 12 86
			80	510 12 87
	Female thread. With secure locking ring. Black CSM gasket. Fileté femelle. Avec verrou sécurisé. Joint CSM noir. <i>Rosca hembra. Con cierre securizado. Junta CSM negro.</i>	SS 316	100	510 12 88
			50	510 12 36
			80	510 12 37

PAGE 99.
Circlip and ferrule.
Jupe et jonc.
Junta y anillo.

AL = Aluminium BR = Brass Laiton Latón ST = Steel Acier Acero SS = Stainless steel Inox PP = Polypropylene

Trelleborg Fittings 2015

		ID coupling Diam. raccord Diam. racor	ID shank Diam. douille Diam. espiga	Ref.
 Female thread. Without locking ring. Without gasket. Fileté femelle. Sans verrou. Sans joint. <i>Rosca hembra. Sin cierre. Sin junta.</i>	SS 316	20	3/4"	510 15 68
		25	1"	510 15 69
		32	1"1/4	510 15 70
		40	1"1/2	510 15 71
		50	2"	510 15 72
		65	2"1/2	510 15 73
		80	3"	510 15 74
		100	4"	510 15 75
 Male thread. With locking ring. Black CSM gasket. Fileté mâle. Avec verrou. Joint CSM noir. <i>Rosca macho. Con cierre. Junta CSM negro.</i>	SS 316	20	3/4"	510 12 59
		25	1"	510 12 60
		32	1"1/4	510 12 61
		40	1"1/2	510 12 62
		50	2"	510 12 63
		65	2"1/2	510 12 64
		80	3"	510 12 65
		100	4"	510 12 66
 Male thread. Without locking ring. Without gasket. Fileté mâle. Sans verrou. Sans joint. <i>Rosca macho. Sin cierre. Sin junta.</i>	SS 316	20	3/4"	510 12 99
		25	1"	510 13 00
		32	1"1/4	510 13 01
		40	1"1/2	510 13 02
		50	2"	510 13 03
		65	2"1/2	510 13 04
		80	3"	510 13 05
		100	4"	510 13 06
 For welding. With locking ring. Black CSM gasket. A souder. Avec verrou. Joint CSM noir. <i>Para soldar. Con cierre. Junta CSM negro.</i>	SS 316	20	26,9	510 12 41
		25	33,7	510 12 42
		32	42,2	510 12 43
		40	48,3	510 12 44
		50	60,3	510 12 45
		65	76,1	510 12 46
		80	88,9	510 12 47
		100	114,3	510 12 48
 For welding. With secure locking ring. BW. Black CSM gasket. A souder. Avec verrou sécurisé. BW. Joint CSM noir. <i>Para soldar. Con cierre securisado. BW. Junta CSM negro.</i>	SS 316	50		510 50 01
		80		510 50 69

AL = Aluminium BR = Brass Laiton Latón ST = Steel Acier Acero SS = Stainless steel Inox PP = Polypropylene

Trelleborg Fittings 2015

		ID coupling Diam. raccord Diam. racor	ID shank Diam. douille Diam. espiga	Ref.
 For welding. Without locking ring. Without gasket. A souder. Sans verrou. Sans joint. <i>Para soldar. Sin cierre. Sin junta.</i>	SS 316	20	26,9	510 12 50
		25	33,7	510 12 51
		32	42,2	510 12 52
		40	48,3	510 12 53
		50	60,3	510 12 54
		65	76,1	510 12 55
		80	88,9	510 12 56
 Reducer. With locking ring. Black CSM gasket. Réduction. Avec verrou. Joint CSM noir. <i>Reductor. Con cierre. Junta CSM negro.</i>	SS 316	100	114,3	510 12 57
		40 - 20		510 12 20
		40 - 25		510 12 21
		40 - 32		510 12 22
		50 - 25		510 12 23
		50 - 32		510 12 24
		50 - 40		510 12 25
		65 - 40		510 12 26
		65 - 50		510 12 27
		80 - 40		510 12 28
		80 - 50		510 12 29
		80 - 65		510 12 30
		100 - 40		510 12 31
 Cap. With handle. Black CSM gasket. Bouchon. A poignée. Joint CSM noir. <i>Tapon. Con punado. Junta CSM negro.</i>	SS 316	80		510 20 09
 Cap. With locking ring. Black CSM gasket. Bouchon. Avec verrou. Joint CSM noir. <i>Tapon. Con cierre. Junta CSM negro.</i>	SS 316			510 13 16
				510 13 17
				510 13 18
				510 13 19
				510 13 20
				510 13 21
				510 13 22
				510 13 23
 Cap. Lockable. Black CSM gasket. Bouchon. Cadenassable. Joint CSM noir. <i>Tapon. Con cadena. Junta CSM negro.</i>	SS 316			510 13 24
				510 23 95
				510 13 35
				510 23 96
				510 13 36
				510 13 37

AL = Aluminium BR = Brass Laiton Latón ST = Steel Acier Acero SS = Stainless steel Inox PP = Polypropylene

Trelleborg Fittings 2015

		ID coupling Diam. raccord Diam. racor	ID shank Diam. douille Diam. espiga	Ref.
 Female thread. With locking ring. Black NBR gasket. Fileté femelle. Avec verrou. Joint NBR noir. <i>Rosca hembra. Con cierre. Junta NBR negro.</i>	BR	20	3/4"	510 23 49
		25	1"	510 23 50
		40	1"1/2	510 91 59
		50	2"	510 91 58
		80	3"	510 18 05
		100	4"	510 23 48
 Female thread. With locking ring. EPDM gasket. Fileté femelle. Avec verrou. Joint EPDM. <i>Rosca hembra. Con cierre. Junta EPDM.</i>	PP	40	1"1/2	510 50 91
		50	2"	510 15 64
		80	3"	510 15 65
		100	4"	510 50 92
 Male thread. With locking ring. EPDM gasket. Fileté mâle. Avec verrou. Joint EPDM. <i>Rosca macho. Con cierre. Junta EPDM.</i>	PP	40	1"1/2	510 50 93
		50	2"	510 12 76
		80	3"	510 12 78
		100	4"	510 50 94
 Reducer. With locking ring. EPDM gasket. Réduction. Avec verrou. Joint EPDM. <i>Reductor. Con cierre. Junta EPDM.</i>	PP	80 - 50		510 15 97
		100 - 80		510 50 95
 Cap. Lockable. EPDM gasket. Bouchon. Cadenassable. Joint EPDM. <i>Tapon. Con cadena. Junta EPDM.</i>	PP	50		510 20 64
		80		510 18 73
		100		510 19 77
 Guillemin/Express. With locking ring. Black NBR gasket. Guillemin/Express. Avec verrou. Joint NBR noir. <i>Guillemin/Express. Con cierre. Junta NBR negro.</i>	AL/BR	40		510 23 98
		65		510 22 69
	SS 316	40		510 23 97
		65		510 17 99

AL = Aluminium
BR = Brass Laiton Latón
ST = Steel Acier Acero
SS = Stainless steel Inox
PP = Polypropylene

Trelleborg Fittings 2015

		ID coupling Diam. raccord Diam. racor	ID shank Diam. douille Diam. espiga	Ref.
 Chain. Chainette. Cadena.		SS 304		510 89 62
	A.	ST	20 - 65	510 13 88
	B.	ST	50 - 100	510 14 76
	C.	ST	20 - 115	510 13 90
	D.	BR	50 - 100	510 15 95
	E.	BR	20 - 115	510 15 96

AL = Aluminium
BR = Brass Laiton Latón
ST = Steel Acier Acero
SS = Stainless steel Inox
PP = Polypropylene

Trelleborg Fittings 2015

			ID coupling Diam. raccord Diam. racor	ID shank Diam. douille Diam. espiga	Ref.
 Gasket. Joint. Junta.	PTFE white. PTFE blanc. PTFE blanco.	PTFE	15		510 13 78
			20		510 13 79
			25		510 13 80
			32		510 13 81
			40		510 13 82
			50		510 13 83
			65		510 13 84
			80		510 13 85
			100		510 13 86
 Gasket. Joint. Junta.	FPM. FPM. FPM.	FPM	15		510 13 69
			20		510 13 70
			25		510 13 71
			32		510 13 72
			40		510 13 73
			50		510 13 74
			65		510 13 75
			80		510 13 76
			100		510 13 77
 Gasket. Joint. Junta.	EPDM white. EPDM blanc. EPDM blanco.	EPDM	15		510 13 60
			20		510 13 61
			25		510 13 62
			32		510 13 63
			40		510 13 64
			50		510 13 65
			65		510 13 66
			80		510 13 67
			100		510 13 68
 Gasket. Joint. Junta.	Black NBR. NBR noir. NBR negro.	NBR	15		510 13 49
			20		510 13 50
			25		510 13 51
			32		510 13 52
			40		510 13 53
			50		510 13 54
			65		510 13 55
			80		510 13 56
			100		510 13 58
			150		510 13 59

Secure Guillemain

NFE 29 572/EN 14 420-8

MATERIAL MATIÈRE MATERIAL

 **SS** = Stainless steel **Inox**

SIZE DIMENSIONS DIMENSIONES


DN 50/80 mm

THREAD FILETAGE ROSCA

BSPP/NF ISO 228-1

GASKETS JOINTS JUNTA

CSM

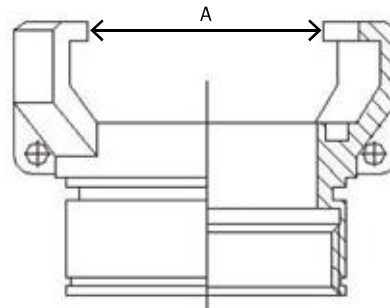

DN	A
50	69
80	104

AL = Aluminium BR = Brass Laiton Latón ST = Steel Acier Acero SS = Stainless steel Inox PP = Polypropylene

Trelleborg Fittings 2015

		ID coupling Diam. raccord Diam. racor	ID shank Diam. douille Diam. espiga	Ref.
	SS 316	50		510 50 01
		80		510 50 69
	SS 316	50	2"	510 12 36
		80	3"	510 12 37
	SS 316	80	76	510 50 86
	SS 316	50	50	510 23 44
		80	80	510 12 39