

PRESTAZIONI - PERFORMANCES - CARACTERISTIQUES - LEISTUNGSBEREICH - PRESTACIONES

MEK/KV 80-60

Prestazioni a 50Hz, 2 poli
Performances at 50Hz, 2 poles
Caractéristiques à 50Hz, 2 pôles
Leistungsbereich bei 50Hz, 2-polig
Prestaciones a 50Hz, 2 polos

Pompa Pump Pompe Pumpe Bomba					Portata - Capacity - Débit - Fördermenge - Caudal											
					l/min	0	800	900	1000	1100	1200	1250	1300	1400	1500	
					m³/h	0	48	54	60	66	72	75	78	84	90	
					l/s	0	13,3	15	16,7	18,3	20	20,8	21,7	23,3	25	
ME25K80-60/2P	ME25KV80-60/2P	•	18,5	25	H m	91	83	79	76	71	66	62	-	-	-	
ME30K80-60/2A	ME30KV80-60/2A	•	22	30		91	83	79,6	75,8	71,2	66,3	64	61	55	48	
ME30K80-60/2P	ME30KV80-60/2P	•	22	30		108	102	99	95	90	84	81	-	-	-	
ME35K80-60/2A	ME35KV80-60/2A	•	26	35		103	97	95	91	87	82	79	76,5	71	64,5	
ME35K80-60/2A	ME35KV80-60/2A	•	30	40		103	97	95	91	87	82	79	76,5	71	64,5	
ME35K80-60/2P	ME35KV80-60/2P	•	26	35		110	106	103	99	95	90,5	88	-	-	-	
ME35K80-60/2P	ME35KV80-60/2P	•	30	40		110	106	103	99	95	90,5	88	-	-	-	
ME40K80-60/3A	ME40KV80-60/3A	•	30	40		128	115	111	105	97,8	89	84	79	66	50	
ME40K80-60/3P	ME40KV80-60/3P	•	30	40		143	131	125	119	112	104	100	-	-	-	
ME50K80-60/3A	ME50KV80-60/3A	•	37	50		148	141	136	130	124	116	111	106	95	81,2	
ME50K80-60/3P	ME50KV80-60/3P	•	37	50		172	162	156	150	144	137	132	-	-	-	
ME60K80-60/3A	ME60KV80-60/3A	•	45	60		175	167	163	158	152	144	140	135	125	114	
ME60K80-60/4P	ME60KV80-60/4P	•	45	60		207	194	188	181	170	159	153	-	-	-	
ME75K80-60/4A	ME75KV80-60/4A	•	55	75		220	215	207	200	190	180	176	170	158	144	
ME75K80-60/4A	ME75KV80-60/4A	•	55	75		220	215	207	200	190	180	176	170	158	144	
ME75K80-60/4P	ME75KV80-60/4P	•	55	75		236	226	220	213	204	193	187	-	-	-	
ME75K80-60/4P	ME75KV80-60/4P	•	55	75		236	226	220	213	204	193	187	-	-	-	



Dimensioni di ingombro in mm e peso in kg
Overall dimensions in mm and weight in kg
Dimensions en mm et masse en kg
Abmessungen in mm, Gewicht in kg
Medidas en mm, peso en kg

*** Per le dimensioni di ingombro e i pesi dei motori vedere pagg. 28 - 29**
* For motors overall dimensions and weights please refer to pages 28 - 29
* Pour les dimensions et les masses des moteurs voir pages 28 - 29
* Gesamtlänge und Gewichte der Unterwassermotoren, siehe Seiten 28 - 29
* Para la dimensiones y los pesos de los motores, consulte las páginas 28 - 29



Pompa Pump Pompe Pumpe Bomba	IEC	A	B	C	D	E	F	Peso Weight Masse Gewicht Peso	
								Pompa Pump Pompe Pumpe Bomba	Motore Motor Moteur Motor Motor
ME25K80-60/2P	•	*	231	*	*	371	297	105	*
ME30K80-60/2A	•	*	231	*	*	371	297	105	*
ME30K80-60/2P	•	*	231	*	*	371	297	105	*
ME35K80-60/2A	•	*	231	*	*	371	297	105	*
ME35K80-60/2A	•	*	231	*	*	371	297	106	*
ME35K80-60/2P	•	*	231	*	*	371	297	105	*
ME35K80-60/2P	•	*	231	*	*	371	297	106	*
ME40K80-60/3A	•	*	301	*	*	441	297	127	*
ME40K80-60/3P	•	*	301	*	*	441	297	127	*
ME50K80-60/3A	•	*	301	*	*	441	297	127	*
ME50K80-60/3P	•	*	301	*	*	441	297	127	*
ME60K80-60/3A	•	*	301	*	*	441	297	172	*
ME60K80-60/4P	•	*	371	*	*	118	297	193	*
ME75K80-60/4A	•	*	371	*	*	118	297	193	*
ME75K80-60/4A	•	*	371	*	*	118	327	223	*
ME75K80-60/4P	•	*	371	*	*	118	297	193	*
ME75K80-60/4P	•	*	371	*	*	118	327	223	*


Pompa Pump Pompe Pumpe Bomba	IEC	A	B	C	D	E	F	Peso Weight Masse Gewicht Peso	
								Pompa Pump Pompe Pumpe Bomba	Motore Motor Moteur Motor Motor
ME25KV80-60/2P	•	*	203	*	*	-	297	112	*
ME30KV80-60/2A	•	*	203	*	*	-	297	112	*
ME30KV80-60/2P	•	*	203	*	*	-	297	112	*
ME35KV80-60/2A	•	*	203	*	*	-	297	112	*
ME35KV80-60/2A	•	*	203	*	*	-	297	113	*
ME35KV80-60/2P	•	*	203	*	*	-	297	112	*
ME35KV80-60/2P	•	*	203	*	*	-	297	113	*
ME40KV80-60/3A	•	*	273	*	*	-	297	134	*
ME40KV80-60/3P	•	*	273	*	*	-	297	134	*
ME50KV80-60/3A	•	*	273	*	*	-	297	134	*
ME50KV80-60/3P	•	*	273	*	*	-	297	134	*
ME60KV80-60/3A	•	*	273	*	*	-	297	137	*
ME60KV80-60/4P	•	*	273	*	*	-	297	158	*
ME75KV80-60/4A	•	*	343	*	*	-	297	158	*
ME75KV80-60/4A	•	*	343	*	*	-	327	188	*
ME75KV80-60/4P	•	*	343	*	*	-	297	158	*
ME75KV80-60/4P	•	*	343	*	*	-	327	188	*

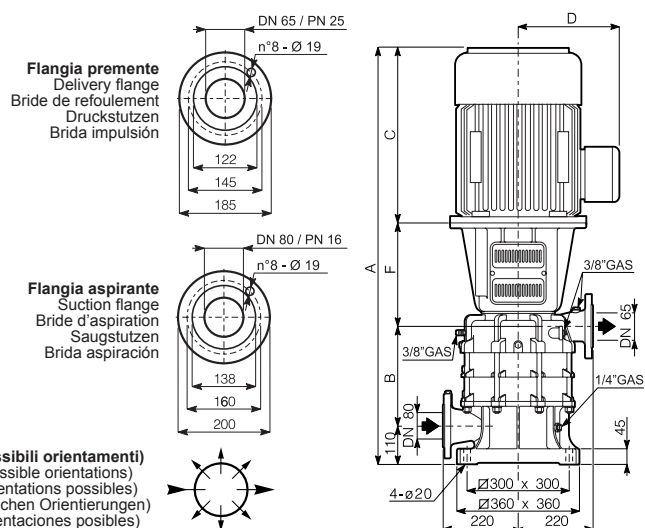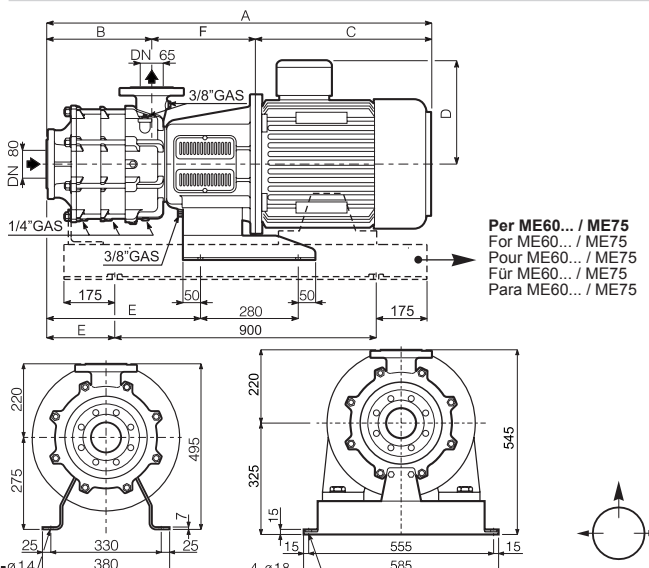

PRESTAZIONI - PERFORMANCES - CARACTERISTIQUES - LEISTUNGSBEREICH - PRESTACIONES

MEK/KV 80-60

Prestazioni a 50Hz, 2 poli
Performances at 50Hz, 2 poles
Caractéristiques à 50Hz, 2 pôles
Leistungsbereich bei 50Hz, 2-polig
Prestaciones a 50Hz, 2 polos

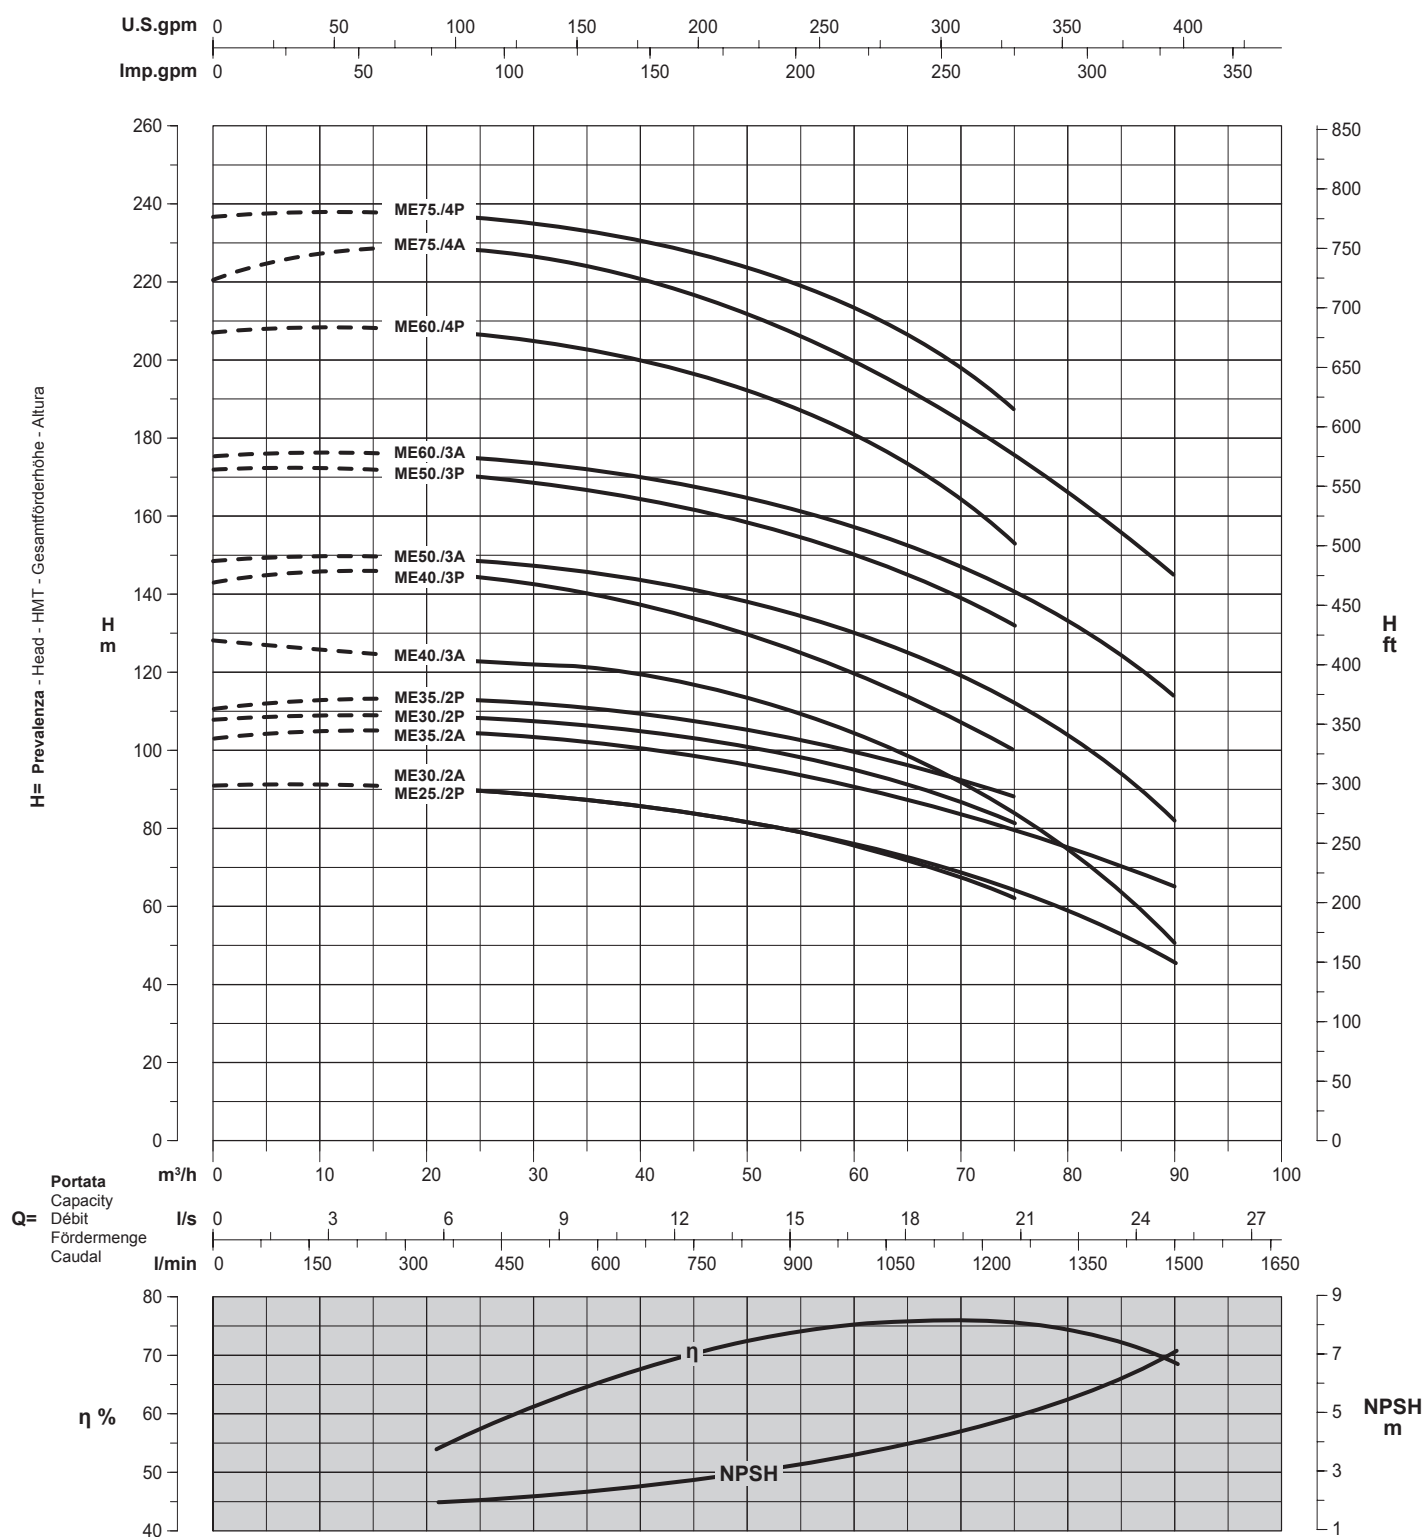

Curve per liquidi aventi densità 1000 kg/m³ - viscosità 1 mm²/s alla temperatura di 20°C
Curves established for liquid density 1000 kg/m³ - viscosity 1 mm²/s - temperature 20°C
Courbes établies pour liquides densité 1000 kg/m³ - viscosité 1 mm²/s - température 20°C
Leistungskurve für Flüssigkeiten mit Dichtigkeit von 1000 kg/m³ - Viskosität 1 mm²/s - Temp. 20°C
Curvas para líquidos con densidad 1000 kg/m³ - viscosidad 1 mm²/s a la temperatura de 20°C

Rendimento della pompa
Pump efficiency
Rendement de la pompe
Wirkungsgrad
Eficiencia de la bomba

Riduzione rendimento
Efficiency reduction
Réduction du rendement
Leistungsminderung
Reducción de eficiencia

/2	=	-2
/3	=	-1
/4	=	-

Possibili aggiornamenti senza preavviso - Revision possible without prior notice - Mises à jour éventuelles sans préavis - Techn. Änderungen vorbehalten - Posibles actualizaciones sin preaviso